


3!
FLEX

PIL-MA


HYDROPHILIC PRELOADED

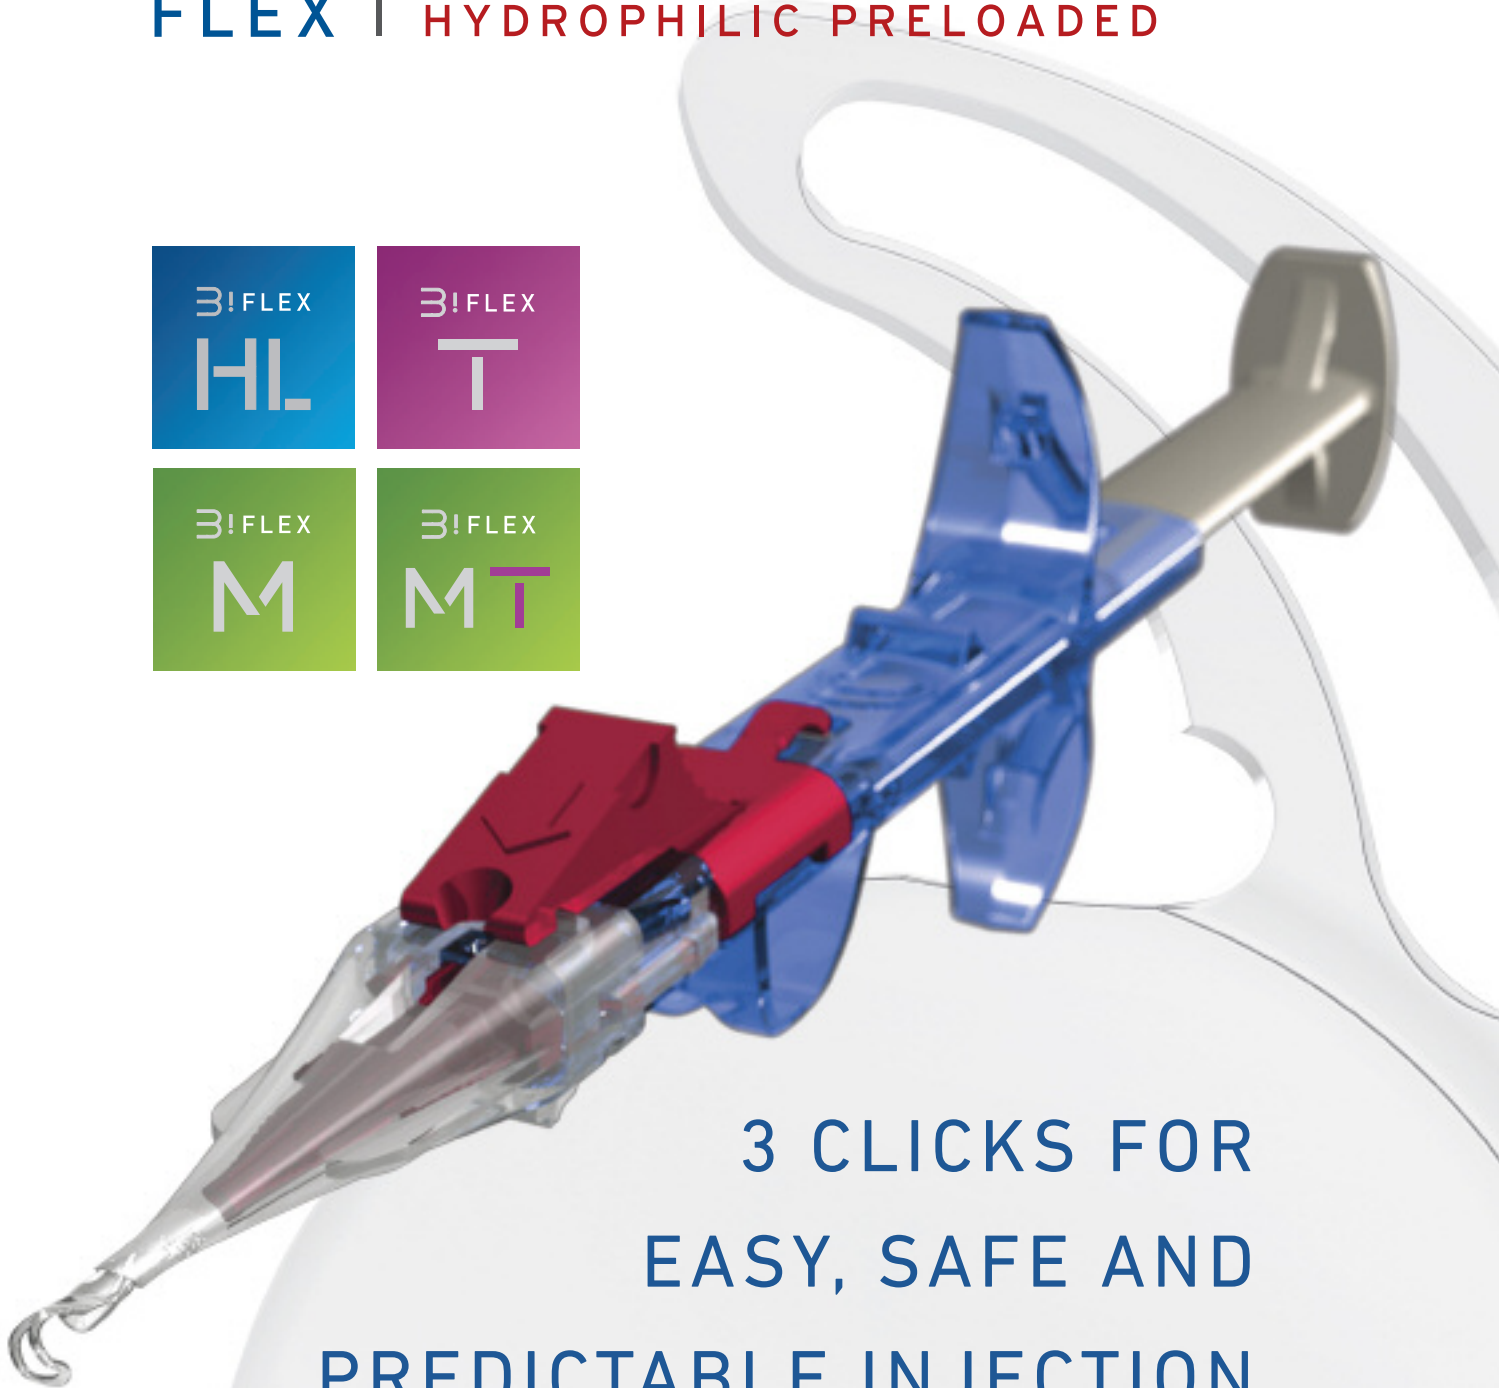

3 CLICKS FOR
EASY, SAFE AND
PREDICTABLE INJECTION

MEDI  **NTUR**

Vision of Expertise

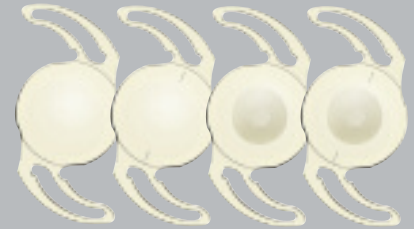


1st CLICK LOADING

Insert the injector to the wet container




2nd CLICK CLOSING

Fold up the cartridge nozzle

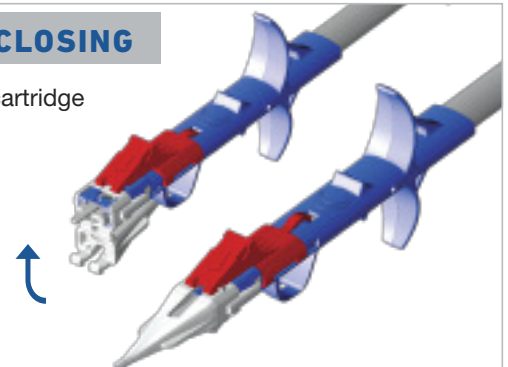


3rd CLICK READY

Push the red stopper forward to the end position and fill visco

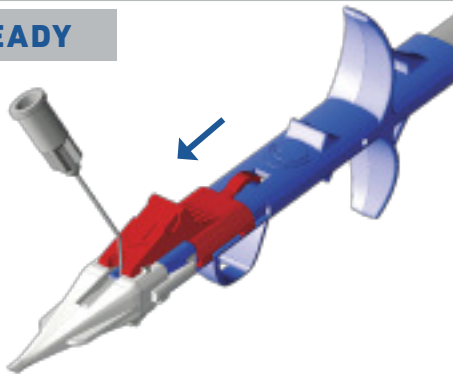

INJECTION

Push the plunger slowly to the end position

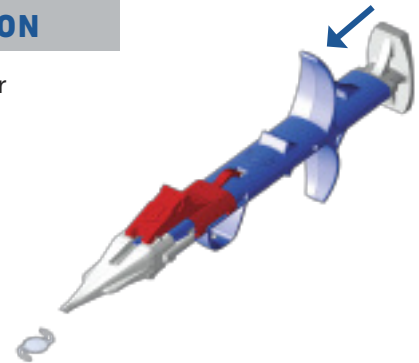

Lens types Single-piece aspheric IOLs, clear and yellow

- Monofocal
- Toric
- Diffractive Progressive
- Toric Diffractive Progressive (Patent pending)

Diameters 6.0 mm (optic)
13.0 mm (overall)

Angulation 0° – asymmetrical design

Material Copolymer of hydrophobic and hydrophilic monomers
25% water content with UV Absorber / + blue light filter (390–470 nm)

Incision size 2.2 mm

PCO protection 360° Special Square Edge

A-Constant 118.9 (SRK/T)



677P/677PY

Powers available -10.0 D → -1.0 D · (increment: 1.0 D)
0.0 D → +30.0 D · (increment: 0.5 D)
+31.0 D → +35.0 D · (increment: 1.0 D)



677PT/677PTY

Powers available -10.0 D → -1.0 D · (increment: 1.0 D)
0.0 D → +30.0 D · (increment: 0.5 D)
+31.0 D → +35.0 D · (increment: 1.0 D)

Cylinders available 1.00 D, 1.50 D, 2.25 D, 3.00 D, 3.75 D, 4.50 D



677PMY

Powers available 0.0 D → +35.0 D · (increment: 0.5 D)

Addition +3.5 D



677PMTY

Powers available +10.0 D → +30.0 D · (increment: 0.5 D)

Cylinders available 1.00 D, 1.50 D, 2.00 D, 2.50 D, 3.00 D, 3.50 D, 4.00 D, 4.50 D

Addition +3.5 D