
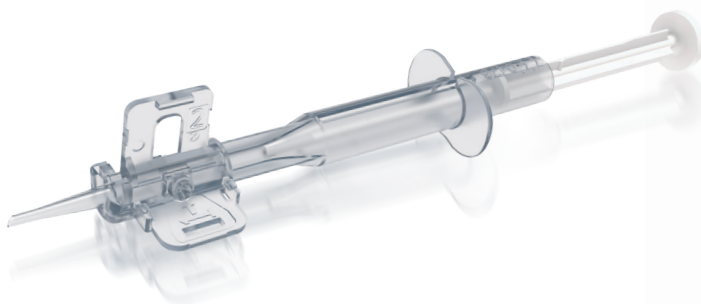


RayOne® Trifocal Technical Information

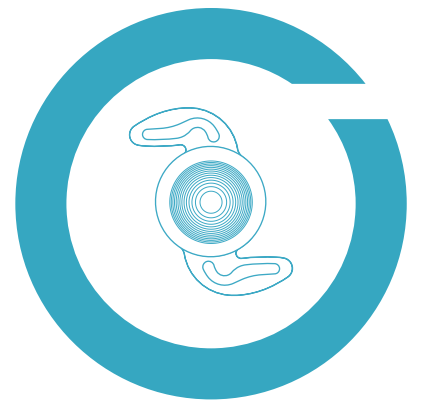

RayOne® Trifocal Technical Information

Model Name:	RayOne® Trifocal
Model Number:	RAO603F
Power Range:	0.0 D to +30.0 D (increments 0.5D) Trifocal, diffractive, +3.5 D near add and +1.75 D intermediate add at the IOL plane

Delivery System	
Injector Type:	Single use, fully preloaded IOL injection system
Nozzle Size:	1.65 mm
Bevel Angle:	45°
Lens Delivery:	Single handed plunger

Aspheric Trifocal IOL	
Material:	Single piece Rayacryl® hydrophilic acrylic
Water Content:	26% in equilibrium
UV Protection:	Benzophenone UV absorbing agent
UV Light Transmission:	UV 10% cut-off is 380 nm
Refractive Index:	1.46
Overall Diameter:	12.50 mm
Optic Diameter:	6.00 mm
Optic Shape:	Biconvex (positive powers)
Asphericity:	Aberration-neutral technology
Optic Edge Design:	Amon-Apple 360° enhanced square edge
Haptic Angulation:	0°, uniplanar
Haptic style:	Closed loop with anti-vaulting haptic (AVH) technology
Estimated A-constant for optical biometry SRK/T	118.6
Estimated A-constant for Contact Ultrasound	118.0

Please note that the constants indicated for all Rayner lenses are estimates and are for guidance purposes only. Surgeons must always expect to personalise their own constants based on initial patient outcomes, with further personalisation as the number of eyes increases.

Discover why RayOne® is in a class of its own visit rayner.com/rayone



Regulatory restrictions may apply in certain markets.
©2017 Rayner Intraocular Lenses Limited.
RayOne is a registered mark of Rayner. EC 2017-56 07/17

GLOBAL HQ & UK OFFICE
RAYNER INTRAOCULAR LENSES LIMITED
10 Dominion Way
Worthing, West Sussex
BN14 8AQ, United Kingdom

Tel: +44 (0) 1903 258 900
Email: iol_enquiries@rayner.com
Web: rayner.com

UK CUSTOMER SERVICE
Tel: +44 (0) 1903 854 560
Email: orders@rayner.com

GERMANY CUSTOMER SERVICE
Tel: +49 30 6290783 - 0
Email: info.de@rayner.com

ITALY CUSTOMER SERVICE
Tel: +39 800 972485
Email: commerciale@rayner.com

SPAIN CUSTOMER SERVICE
Tel: +34 910 480055
Email: atcliente@rayner.com